


DEV 3480, DEV 3482, and DEV 3483 - MODULO Active Frames
DEV 3481 and DEV 3484 - MODULO Passive Frames
DEV 3490 - MODULO AC/DC Power Supply
DEV 3491 - MODULO DC/DC Power Supply

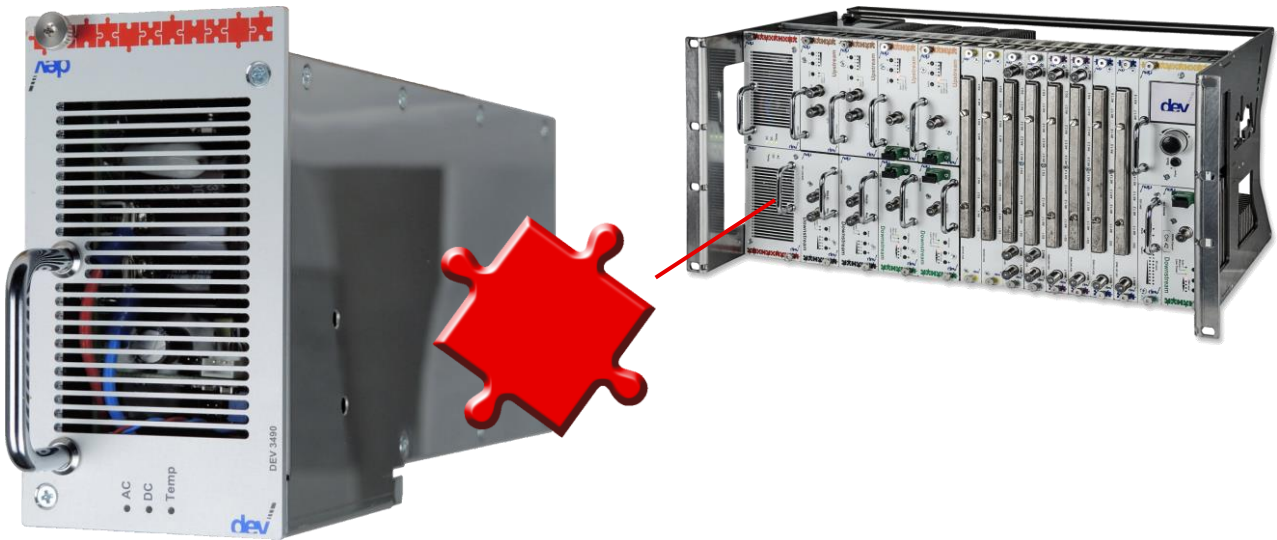


Features Active/Passive Frames:

- ▀ DEV 3480 (5 RU): Up to 18 active Modules + 2 Power Supplies or up to 22 passive Modules
- ▀ DEV 3481 (5 RU): Up to 22 passive Modules
- ▀ DEV 3482 (2 RU): Up to 3 active Modules + 4 passive Modules (equipped with Redundant Power Supply)
- ▀ DEV 3483 (3 RU): Up to 8 active Modules + 2 Power Supplies
- ▀ DEV 3484 (1 RU): Up to 4 passive Modules
- ▀ 50% higher Density than conventional Products
- ▀ Cable Relief on the Rear

Features Power Supplies:

- ▀ 200 W @ 45 °C
- ▀ 1+1 redundant Configuration
- ▀ Local LED Monitoring

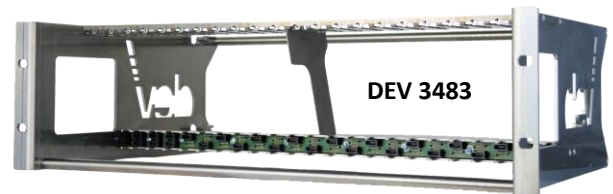

Technical Data DEV 3480 & DEV 3481 (Active & Passive Frames; 5 RU)

General Specification	Value	Condition
Number of Slots (Module Height)	22 (5 RU) or 44 (2.5 RU)	
Size	19" (483 mm) Width, 5 RU (222 mm) Height, 11.8" (300 mm) Depth	
Weight	~3.3 kg	

Technical Data DEV 3482 (Active Frame; 2 RU; equipped with Redundant Power Supply)

General Specification	Value	Condition
Number of Slots (Module Height)	4 (5 RU) + 6 (2.5 RU)	
Supply Voltage	100...240 V AC	
Output Voltage	24 VDC	
Output Power	200 W	per Power Supply Module
Size	19" (483 mm) Width, 2 RU (89 mm) Height, 18.9" (480 mm) Depth	
Weight	~4.2 kg	
Environmental Conditions	ETS 300019 Part 1-3 Class 3.1E	
Operating Temperature	0...50 °C (32...122 °F)	
Storage Temperature	-40...+70 °C (-40...+158 °F)	
Storage Humidity	5...95 %	Non-condensing

Technical Data DEV 3483 (Active Frame; 3 RU)

General Specification	Value	Condition
Number of Slots (Module Height)	22 (2.5 RU)	
Size	19" (483 mm) Width, 3 RU (133 mm) Height, 11.8" (300 mm) Depth	
Weight	~2.8 kg	

Technical Data DEV 3484 (Passive Frame; 1 RU)

General Specification	Value	Condition
Number of Slots (Module Height)	4 (5 RU)	
Size	19" (483 mm) Width, 1 RU (44 mm) Height, 5.5" (140 mm) Depth	
Weight	~0.6 kg	

Technical Data DEV 3490 (AC/DC Power Supply)

General Specification	Value	Condition
Supply Voltage	100...240 V AC	
Output Voltage	24 VDC	
Output Power	200 W	
Size	2.36" (60 mm) Width (3 slots), 2.5 RU (110 mm) Height, 9.65" (245 mm) Depth	
Weight	~2.4 kg	
Environmental Conditions	ETS 300019 Part 1-3 Class 3.1E	
Operating Temperature	0...50 °C (32...122 °F)	
Storage Temperature	-40...+70 °C (-40...+158 °F)	
Storage Humidity	5...95 %	Non-condensing

Technical Data DEV 3491 (DC/DC Power Supply)

General Specification	Value	Condition
Supply Voltage	-36...-72 VDC & +36...+72 VDC	
Output Voltage	24 VDC	
Output Power	200 W	
Size	2.36" (60 mm) Width (3 slots), 2.5 RU (110 mm) Height, 9.65" (245 mm) Depth	
Weight	~1.8 kg	
Environmental Conditions	ETS 300019 Part 1-3 Class 3.1E	
Operating Temperature	0...50 °C (32...122 °F)	
Storage Temperature	-40...+70 °C (-40...+158 °F)	
Storage Humidity	5...95 %	Non-condensing

Order Information

Products	
DEV 3480	MODULO Active Frame; 5 RU
DEV 3481	MODULO Passive Frame; 5 RU
DEV 3482	MODULO Active Frame; 2 RU; equipped with Redundant Power Supply
DEV 3483	MODULO Active Frame; 3 RU
DEV 3484	MODULO Passive Frame; 1 RU
DEV 3490	MODULO Power Supply; 100...240 V; 2.5 RU, 200 W
DEV 3491	MODULO Power Supply; -36...-72 VDC & +36...+72 VDC; 2.5 RU, 200 W

Contact

DEV Systemtechnik GmbH
 Grüner Weg 4A
 61169 Friedberg
 GERMANY
 Phone: +49 6031 6975 100
 Fax: +49 6031 6975 114
info@dev-systemtechnik.com
www.dev-systemtechnik.com

Rev. 17-May-2018

Technical specifications are subject to change